


Ros Circuit Plan

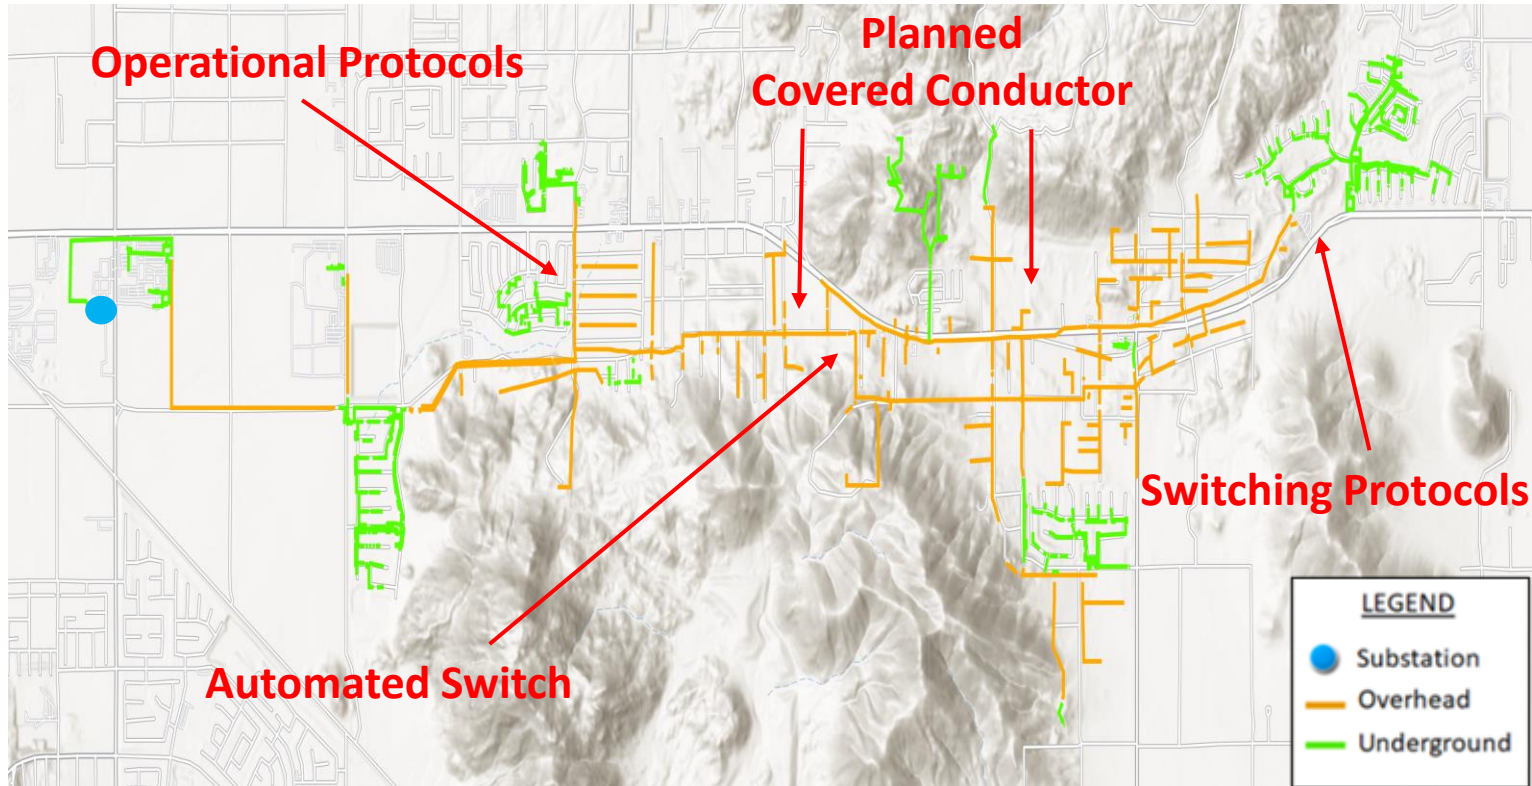

Planned Work:

- Install 1 automated switch and implement additional circuit segmentation
- Replace 16.5 miles of existing overhead wire with new covered conductor
- Implement operational protocols to raise PPS windspeed thresholds
- Update switching protocols

Expected Improvements:

- **87% reduction** in customer outage time, assuming the same weather conditions as 2021 and 2022