


SAND CANYON CIRCUIT PLAN

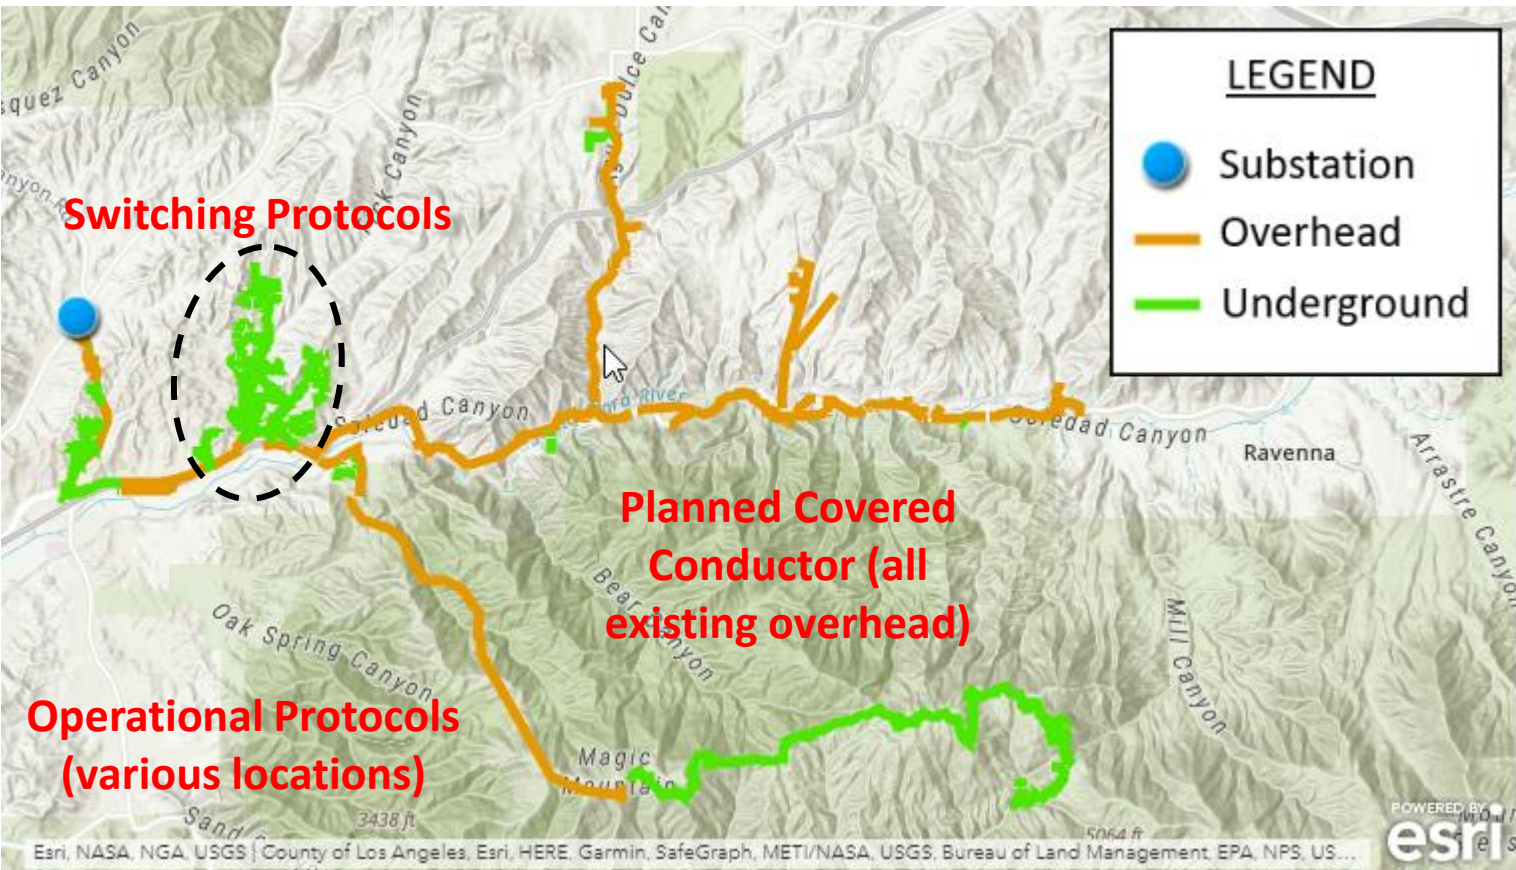

Planned Work:

- Replace 22.8 miles of existing overhead wire with new covered conductor
- Update switching protocols
- Implement operational protocol for portions of the circuit

Expected Improvements:

- **96% reduction** in customer outage time, assuming the same weather conditions in 2020