Appendix A – WDT1687

Queue Cluster 13 Phase I Report

January 25, 2021

This study has been completed in coordination with the California Independent System Operator Corporation (ISO) per Southern California Edison Company's Wholesale Distribution Access Tariff (WDAT), Attachment I Generator Interconnection Procedures (GIP)

CONFIDENTIAL

Interconnection Study Document History

No.	Date	Document Title	Description of Document
1	01/25/21	Queue Cluster 13 Phase I Appendix A Report	Final Phase I interconnection study report

TABLE OF CONTENTS

A.	Introduction	1
В.	Report Objective	1
C.	Description of Generating Facility	1
D.	Study Assumptions	6
E.	Technical Requirements	10
F.	Reliability Standards, Study Criteria and Methodology	12
G.	Study Results	13
н.	Affected Systems SCD Results	23
I.	Deliverability Assessment Results	
J.	Interconnection Facilities, Network Upgrades, and Distribution Upgrades	25
K.	Cost and Construction Duration Estimate	25
L.	In-Service Date and Commercial Operation Date Assessment	
М.	Additional Study Annotations	
ΑT	TACHMENTS	
Att	achment 1: Interconnection Facilities, Network Upgrades, and Distribution Upgrades	33
Att	achment 2: Escalated Cost and Time to Construct for Interconnection Facilities, Reliability Netwo	rk
Up	grades, Delivery Network Upgrades, and Distribution Upgrades	34
Att	achment 3: Allocation of Network Upgrades for Cost Estimates and Maximum Network Upgrade	
Cos	st Responsibility	35
Atta	achment 4: SCE's Interconnection Handbook	37
Att	achment 5: Short-Circuit Duty Calculation Study Results	38
Atta	achment 6: IC Provided Generating Facility Dynamic Data	39
Δtt	achment 7: Subtransmission Assessment Report	41

A. INTRODUCTION

, the Interconnection Customer ("IC"), has submitted a completed Interconnection Request ("IR") to Southern California Edison ("SCE"), the Distribution Provider, for its proposed ("Generating Facility"). The IC's IR stipulated for the Generating Facility. In addition, the IC requested an In-Service Date ("ISD") and Commercial Operating Date ("COD") of respectively. However, the actual in-service dates for the Generating Facility will depend on the duration required for: licensing, engineering, detailed design, and construction associated with the facilities required to interconnect the Generating Facility. The duration for these activities would commence after the Generation Interconnection Agreement ("GIA") for the Generating Facility has been executed or filed at the Federal Energy Regulatory Commission ("FERC") for acceptance and funded.

In accordance with FERC's approved SCE's Wholesale Distribution Access Tariff ("WDAT") Attachment I Generator Interconnection Procedures ("GIP"), the Generating Facility was grouped with Queue Cluster 13 ("QC13") Phase I projects to determine the impacts of the group as well as impacts of the Generating Facility on SCE's Distribution System and the ISO Grid. An Area Report and, where applicable, a Subtransmission Assessment Report have been prepared separately to discuss the combined impacts of all projects on the ISO Grid and to the distribution facilities served out of the Subtransmission System, respectively. This Appendix A report focuses only on the impacts or impact contributions of the Generating Facility to SCE's Electric System and is not intended to supersede any contractual terms or conditions specified in a forthcoming GIA.

B. REPORT OBJECTIVE

SCE performed a QC13 Phase I Study that included the Generating Facility, and this report addresses the results of the analysis.


The report provides the following:

- 1. Transmission and Distribution system impacts attributed to the Generating Facility.
- 2. System reinforcements or mitigation necessary to address the adverse impacts attributed to the Generating Facility under various system conditions.
- 3. A list of required facilities and a good faith estimate of the Generating Facility's cost responsibility and SCE's construction schedule¹, assuming SCE is constructing the required facilities. Such information is provided in Attachment 1 and Attachment 2 as separate documents in the Appendix A report package for the Generating Facility.
- **a.** Identification of potential short circuit duty impacts to Affected Systems served from the Transmission, Subtransmission or Distribution System.

C. DESCRIPTION OF GENERATING FACILITY

Generating Facility: all equipment and facilities comprising the IC's Generating Facility located in the California as disclosed by the IC in its IR, as may have been amended during the Interconnection Study process, as summarized below:

¹It should be noted that construction is only part of the duration of months specified in the study, which includes final engineering, licensing, and other activities required to bring such facilities into service. These durations are from the execution of the GIA, receipt of: all required information, funding, and written authorization to proceed with design and engineering, procurement, and construction from the IC as will be specified in the GIA to commence the work.

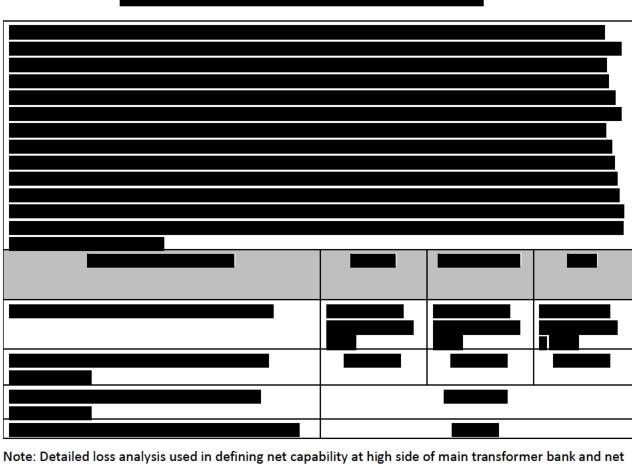

capacity at the POI

Generation Export Limit for the Generating Facility

The IC has requested a total net capaci	city of	as measured at the high-side of the main
step-transformer(s) and	at the POI.	The Parties acknowledge that should the
Generating Facility exceeds these valu	ies or is cap	pable of exceeding these values the IC agrees to:
install, own, operate and maintain a c	ontrol limit	ting device or, alternatively, limit output by means
		ystem. This is to ensure the Generating Facility does e of the main step-up transformer(s) and POI.

The scope of facilities that will be installed by SCE and the IC for physical interconnection of the Generating Facility, to provide for the requested output at the POI taking into account the requested Deliverability, and in support of ACDS resulting from this study are detailed in Attachment 1 to this Appendix A report. The proposed plan for interconnecting the Generating Facility is illustrated in Figure A.1. and Figure A.2 illustrates the proposed location of the Generating Facility. Additional information is provided in Table A.2



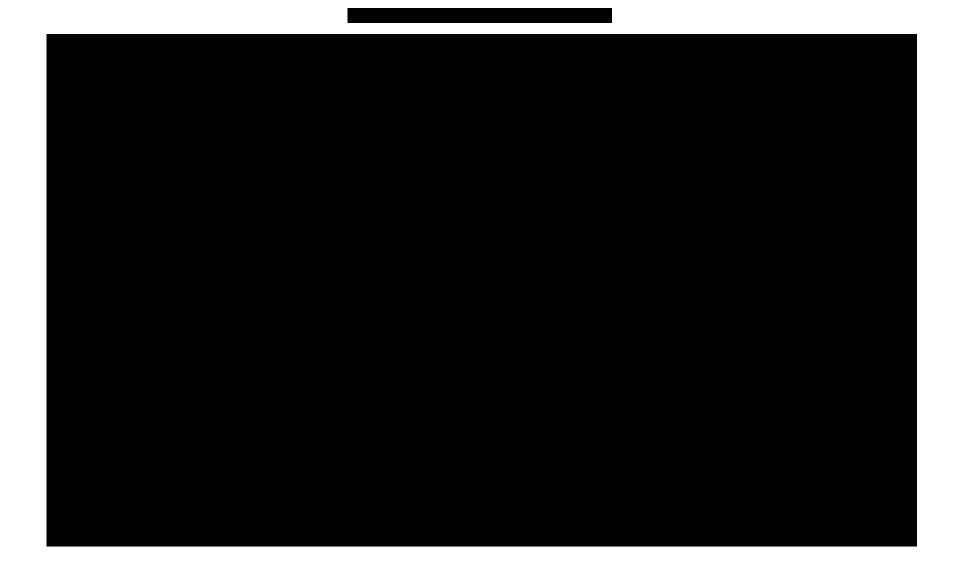


Table A.2: Additional Generating Facility General Information per IR

Generating Facility Location	
SCE's Planning Area	
Interconnection Voltage	
POI	
Number and Types of Generators	
Requested Maximum Generating Facility	
Delivery at Point of Interconnection ²	
Generation Tie Line	
Main Step-Up Transformer(s)	
Main Transformers T1	
Collector Equivalent	
Padmount Transformer(s)	
Pad-Mount Transformer(s)	
Downstream of Main Transformer Bank T1	
Generator Data	
Downstream of Main Transformer Bank T1	
Generator Auxiliary Load and/or Station Light	
and Power	
Voltage Regulation Devices	

D. STUDY ASSUMPTIONS

For detailed assumptions regarding the transmission and subtransmission system, please refer to the Area Report and Subtransmission Assessment Report, respectively. Below are the assumptions specific to the Generating Facility:

- 1. The Generating Facility was modeled as described in Table A.1 and A.2 above.
- 2. Wildfire mitigation measures have been incorporated into all of SCE's construction standards and operational practices. SCE has notified ICs with a proposed project(s) and associated Interconnection Facilities to be in, or interconnecting to, an identified high fire risk area ("HFRA") or high fire risk area circuit ("HFRA circuit"). As a result of implementing these mitigation measures, please be advised that the facilities and their associated costs identified in this Appendix A report (Attachment 1 and Attachment 2) are above and beyond the mitigation identified in previous cluster studies. SCE is implementing these measures to address the heightened wildfire risk in HFRAs and HFRA circuits. In the future, SCE may develop and implement additional mitigation measures in these HFRAs that are not identified in this study as

² The MW output at the POI varies under different operating conditions. The IC is reminded that this value is tied to the generation tie-line (gen-tie) losses. The estimated Maximum Net Output value at POI and gen-tie Losses illustrated above are contingent upon the accuracy of the technical data provided by the IC and are subject to change should the IC change its gen-tie parameters during the final engineering and design phase of the Generating Facility. Please note that the Generating Facility shall not exceed the total net output of at the POI.

a means of continuously ensuring the safety and reliability of SCEs Electric System and the public it serves. If this occurs prior to in servicing the Generating Facility, additional scope will be included via an addendum to this study report or via Technical Study report outlining the facilities.

- 3. The facilities that will be installed by SCE and the IC are detailed in Attachment 1.
- 4. Environmental Activities, Permits, and Licensing.

The assumptions for the Environmental Activities, Permits, and Licensing are as follows:

i. SCE's Interconnection Facilities ("IF") and Distribution Upgrades ("DU") needed to interconnect the Generating Facility:

SCE's scope of work will require a California Public Utilities Commission ("CPUC") license.

- a. SCE's IFs and DUs needed to interconnect the Generating Facility:
 - SCE will file for an "expedited" Certificate of Public Convenience and Necessity or "expedited" Permit to Construct³ by attaching the IC's certified final California Environmental Quality Act ("CEQA") document with SCE's scope of work sufficiently incorporated in lieu of a Proponent's Environmental Assessment ("PEA"). If a CEQA document is not required for the Generating Facility or if the Generating Facility's CEQA document does not sufficiently incorporate SCE's scope of work, SCE may be required to prepare a PEA for SCE's scope of work. In such cases, SCE's assumed environmental work and licensing level of effort will increase, resulting in the need to update cost and duration estimates, and potentially amend the IA.
 - SCE will act as the lead for regulatory agency communication for permits issued to SCE covering SCE facilities.
 - SCE environmental activities may include, but are not limited to, the following:
 - Perform all environmental studies and construction monitoring of SCE internal substation construction activities and provide study results to the IC for inclusion in its environmental documents, if applicable.
 - Collaborate with the IC during the environmental study phase on the IC's proposed study methodologies and findings, as studies are being planned and performed for SCE's scope of work.
 - Review IC's CEQA and/or National Environmental Policy Act ("NEPA") documents, technical studies, surveys, and other environmental documentation to ensure SCE's scope of work is adequately described in such documents (IC will include SCE's scope of work in its environmental documents. If the Generating Facility's CEQA and/or NEPA documents do not sufficiently incorporate SCE's scope of work, SCE's assumed environmental work and permitting level of effort may increase, resulting in the need to update cost and duration estimates, and potentially amend the GIA).
 - o Review SCE's internal existing technical reports/documents when available.
 - Prepare SCE's IF and DU description of the Generating Facility, including scope changes during permitting/pre-construction or construction.

Appendix A - QC13 Phase I

³ See Appendix K of the Area report for additional discussion regarding "expedited" Certificate of Public Convenience and Necessity and "expedited" Permit to Construct.

- Communicate scope changes to the IC's environmental team and discuss/approve subsequent actions including new surveys as necessary.
- Complete General Order 131-D Consistency Determination and Environmental Evaluation.
- Regulatory agency communication, consultation, reporting, and acquisition of SCE permits addressing SCE's facilities and scope of work.
- o Prepare environmental requirements for construction clearance.
- o Develop communication plan.
- Perform pre-construction coordination field visit.
- Provide Environmental Awareness/Worker Environmental Awareness Program ("WEAP") training.
- o Perform construction monitoring oversight for IFs and DUs.
- Complete construction and post-construction site assessments.
- IC performs all environmental studies and prepares draft environmental permit applications related to the installation of SCE's IFs and DUs, except for the SCE internal substation activities as described above. The IC's responsibilities include as applicable, but are not limited to: notifications to the Native American Heritage Commission ("NAHC") and follow-up notifications to the tribes and individuals in the NAHC contact list; performing cultural and paleontological resources records searches, cultural resources inventories (survey and recording), testing and evaluation and/or data recovery of archaeological sites, and appropriate documents in the form of inventory reports, research design and/or data recovery reports; cultural and paleontological monitoring when/if required, and arranging curation agreements for artifacts and fossil specimens collected; performing a California Natural Diversity Database search, habitat assessment, and protocol or focused surveys for species with the potential of occurring in identified suitable habitat; conducting jurisdictional delineations for wetlands or other regulated waters; preparing draft environmental permit applications, pre-construction biological resource surveys for IFs and DUs, biological resource monitoring during construction for IFs and DUs, and cultural and paleontological monitoring during construction for IFs and DUs; mitigation costs including, but not limited to, offsite/compensatory mitigation and onsite restoration, and developing mitigation plans or other environmental reports or submittals to support installation of SCE's IFs and DUs.
- Prior to commencing work and during execution of work, the IC should collaborate
 and obtain SCE concurrence on all work outlined above. The IC is advised that
 should the environmental studies and resulting reports not meet the industry
 standards utilized in the State of California and/or by SCE in accordance with
 Applicable Laws and Regulations, as determined by SCE, the IC shall be required to
 remedy all deficiencies under SCE's direction.
- The estimated costs provided in this study assume that the IC will perform part of the environmental scope of work that would normally be performed by SCE for SCE-owned IFs and DUs, if applicable, to interconnect the Generating Facility. The IC shall provide SCE a signed declaration summarizing the actual costs for work performed by the IC within thirty (30) calendar days from the Generating Facility's ISD. The IC acknowledges and accepts that these costs will be subject to an Interconnection Facilities Charge, a Distribution Facilities Charge, if applicable, and Income Tax Component of Contribution ("ITCC").

• As a requirement for Interconnection Customers electing to share the responsibility to perform the Environmental Activities for SCE-owned IFs, DUs as disclosed above, and to ensure proper accounting of costs used in the calculation of the ITCC and Operations & Maintenance ("O&M") charges, referred to as an Interconnection Facilities Charge and/or a Distribution Upgrades Charge, if applicable in the forthcoming GIA for the Generating Facility, the IC is required to complete and submit an Environmental Services Costs Declaration for SCE-owned IFs and/or DUs required to interconnect the Generating Facility. An authorized representative of the IC will sign the Form attesting to the actual costs spent on environmental services work that would otherwise have been performed by SCE for SCE-owned IF and/or DUs required to interconnect the Generating Facility.

The declaration shall be provided to SCE by a specified date in the Generating Facility's forthcoming GIA Appendix B - Milestone table. Should the IC fail to provide the declaration by the specified deadline, SCE will hold the IC in default of the GIA pursuant to the terms therein. The costs declared by the IC in the declaration, once approved, will be used by SCE to adjust the ITCC and the applicable monthly O&M charges for the Generation Facility and will be reflected via an amendment to the GIA upon true-up.

The information stated in the declaration is subject to review and/or audit by SCE pursuant to the terms and conditions in the forthcoming GIA. Should an audit be deemed necessary by SCE, the IC will need to provide supporting documentation (copies of invoices/receipts) to substantiate the costs stated in the declaration within ten (10) business days from receipt of notice.

- ii. SCE's Reliability Network Upgrades ("RNUs") and Delivery Network Upgrades ("DNUs") assigned to the Generating Facility:
 - SCE will perform all required environmental studies, prepare environmental permit
 applications, obtain required environmental permits, and perform monitoring of all SCE
 construction activities related to the installation of SCE's RNUs and DNUs.
 - Under certain circumstances, the RNUs and/or DNUs may need to be described and analyzed as part of the IC's CEQA and/or NEPA documents for the Generating Facility. Further coordination to discuss these circumstances may occur during GIA negotiations and/or after GIA execution. Any changes to the environmental and licensing assumptions may result in the need to update cost and duration estimates, and potentially amend the GIA.
- iii. For further details on the environmental evaluation and permitting/licensing requirements for generation interconnection projects, refer to Appendix K of the Area report.
- 5. Other Items to Consider:
 - Final metering requirements will be identified as part of the execution the Generating Facility and could result in modifications to the Generating Facility.

E. TECHNICAL REQUIREMENTS⁴

1. Preliminary Protection Requirements

Protection requirements are designed and intended to protect SCE's electric system only. The preliminary protection requirements were based upon the interconnection plan as shown in the one-line diagram depicted in line item #4 in Attachment 1.


The IC is responsible for the protection of its own system and equipment and must meet the requirements in the SCE's Interconnection Handbook.

2. Power Factor Requirements

The Generating Facility will be required to maintain a composite power delivery at continuous rated power output at the terminals of the Electric Generating Unit at a power factor within the range of 0.95 leading to 0.90 lagging.

3. Operating Voltage Requirements

Under real-time operations, the Generating Facility will be required to operate under the control of automatic voltage regulator with settings as shown in the figure below. The actual values of the Vmin and Vmax will be provided once the Generating Facility executes a Generation Interconnection Agreement ("GIA") and final engineering and design is complete. The Vmin and Vmax values are to be used as the basis for setting up the automatic voltage control mode (with its automatic voltage regulator in service and controlling voltage) of the Generating Facility in order to maintain scheduled voltage at a reference point.

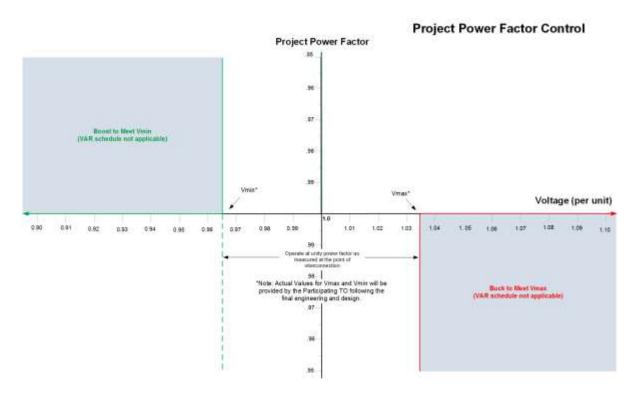

⁴ The IC is advised that it shall comply with mandatory regulatory standards of but not limited to FERC/NERC/WECC/CPUC and there may be technical requirements in addition to those that outlined above in Section C of this report that are included in the SCE's Interconnection Handbook or that will be addressed in the Generating Facility's GIA.

4. Harmonic Requirements

The harmonic impact of the subject inverter-based generation was not part of this study. Impacts on voltage distortion levels may be significant due to the penetration level of the Generating Facility with respect to the local distribution grid strength. As with all equipment connected to SCE's Electric System, the Generating Facility will be subject to the provisions of CPUC Rule 2.E, allowing SCE to require the IC to mitigate interference with service to other SCE customers, including harmonic impacts, if the harmonic interference is caused by the IC.

5. Sub-Synchronous Control Interaction

A detailed screening for Sub-Synchronous Control Interaction ("SSCI") will be performed as part of the Phase II study utilizing the technical data in PSLF format (epc and dyd files) provided by the IC. The detailed screening will identify if a detailed Power System Computer Aided Design ("PSCAD") model of the Generating Facility and associated control systems, along with the manufacturer representative's contact information, may require further SSCI analysis. If a complete SSCI study is required using the Generating Facility PSCAD model, this will be done as part of execution for the Generating Facility and will need to be completed prior to initial synchronization of the Generating Facility. The SSCI study will identify potential controls interaction that will need to be mitigated by the IC. Any identified mitigation shall be at the expense of the IC.

Conventional synchronous generating facilities are susceptible to Sub-synchronous Interactions including Sub-synchronous Resonance ('SSR") and Sub-synchronous Torsional Interactions ('SSTI") The IC will be 100% responsible for conducting any studies related to SSR or SSTI including screening and/or final engineering studies. The IC will be responsible for performing a SSR or SSTI study as part of project execution and will need to be completed prior to initial synchronization of the Generating Facility. The SSR or SSTI study will identify any mitigation(s) that will be required. Any identified mitigation shall be at the expense of the IC.

Synchronous generators close to a series compensated transmission line and all inverter-based generators are required by the ISO Transmission Planning Process Business Practice Manual to submit an electromagnetic transient model. The PSCAD model, if required, must be submitted within one hundred twenty (120) calendar days of achieving its commercial operation date, or from the date of request made by the ISO, whichever is later.

Low/High Voltage Ride-Through ("LHVRT") and Low/High Frequency Ride-Through ("LHFRT") Capability

Consistent with PRC-024, the Generating Facility may not trip or cease to inject current within the "no-trip" zone of the frequency and voltage ride through curves of PRC-024. Momentary cessation—ceasing to inject current during a fault—is prohibited unless transient high voltage conditions rise to 1.20 per unit or more. For transient low voltage conditions, the Generating Facility will inject reactive current directionally proportional to the decrease in voltage. The inverter must produce full rating reactive current when the AC voltage at the inverter terminals drops to a level of 0.50 per unit and must continue to operate and attempt to maintain voltage for transient voltage conditions between 1.10 and 1.20 per unit. In addition, the Generating Facility may not trip or cease to inject current for momentary loss of synchrony within the notrip zone of PRC-024.

7. Primary Frequency Response Requirement

Per FERC Order 842, the IC is required to install a governor or equivalent controls with the capability of operating: (1) with a maximum 5 percent droop and ±0.036 Hz deadband; or (2) in accordance with the relevant droop, deadband, and timely and sustained response settings from the Approved Applicable Reliability Standards providing for equivalent or more stringent parameters. The IC shall ensure that the Electric Generating Unit's real power response to sustained frequency deviations outside of the deadband setting is automatically provided and shall begin immediately after frequency deviates outside of the deadband, and to the extent the Electric Generating Unit has operating capability in the direction needed to correct the frequency deviation.

Per FERC Order 841, nuclear generating facilities and certain Combined Heat and Power ("CHP") facilities are exempt from these primary frequency response requirements.

F. RELIABILITY STANDARDS, STUDY CRITERIA AND METHODOLOGY

Study Criteria

The generator interconnection studies were conducted to ensure the ISO Grid follows the North American Electric Reliability Corporation ("NERC") reliability standards, WECC regional criteria, and the ISO planning standards. Refer to Section C of the Area Report for details of the applicable reliability standards, study criteria, and methodology. In addition, the Subtransmission Assessment was performed in compliance with SCE's Subtransmission Planning Criteria and Guidelines.

SCE Short Circuit Duty Study Methodology

All bus locations where the Phase I projects increased the Short Circuit Duty ("SCD") by 0.1 kA or more and where duty was found to be in excess of 60% of the minimum breaker nameplate rating are listed in the Area Report (Appendix H) and applicable Subtransmission Assessment Report (Attachment 7). These values have been used to determine if any SCE equipment is overstressed and associated mitigation. Similarly, this information is also utilized to identify any SCE-owned substations that may require a ground grid study.

The responsibility to finance the SCD mitigation(s) identified in the Phase II Study due to increases in SCD, shall be assigned pro rata to all projects requiring the SCD mitigation based on their respective SCD contribution.

Coordination with Affected Systems

Per GIP section 3.7, SCE will notify the Affected System Operators that are potentially affected by an IC's IR or group of interconnection requests subject to a Group Study. SCE will coordinate the conduct of any studies required to determine the impact of the IR on Affected Systems with Affected System Operators and, if possible, include those results (if available) in its applicable Interconnection Study within the time frame specified in the GIP. SCE will include such Affected System Operators in all meetings held with IC as required by the GIP. IC will cooperate with SCE in all matters related to the conduct of studies and the determination of modifications to Affected Systems. A transmission provider which may be an Affected System shall cooperate with SCE with whom interconnection has been requested in all matters related to the conduct of studies and the determination of modifications to Affected Systems.

G. STUDY RESULTS

- 1. ISO controlled facilities (Bulk Level Facilities)
 - a. Generation Export Analysis




For details of the analysis and overload level please refer to the Area Report. Refer to Attachment 1 and Attachment 2 for additional scope and costs information related to these upgrades.

- Transient Analysis
 Refer to the Area Report for additional details pertaining to the transient stability evaluation criteria and assessment results on the Bulk System, respectively.
- b. Deliverability Assessment

Section I – Deliverability Assessment Results of this report provides information on any Delivery Network Upgrades (Local or Area) assigned to the Generating Facility, if any.

- c. SCD Analysis
 - i. SCE-owned Facilities

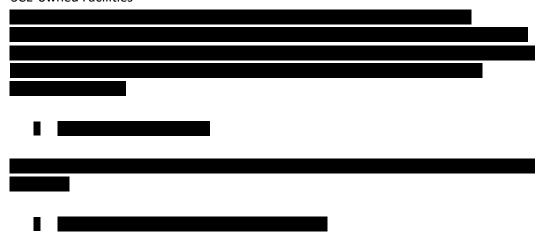

Please refer to the Area Report for additional details on the study, and to the Attachment 1 and Attachment 2 documents for scope and costs information related to these upgrades.


ii. SCE's Ground Grid Duty Concerns




d. As-Available Charging Analysis



- 2. Non-ISO controlled Subtransmission System (66 kV or 115 kV)
 - a. Generation Export Analysis
 - i. Steady State Power Flow Analysis
 - 1. Thermal Overloads

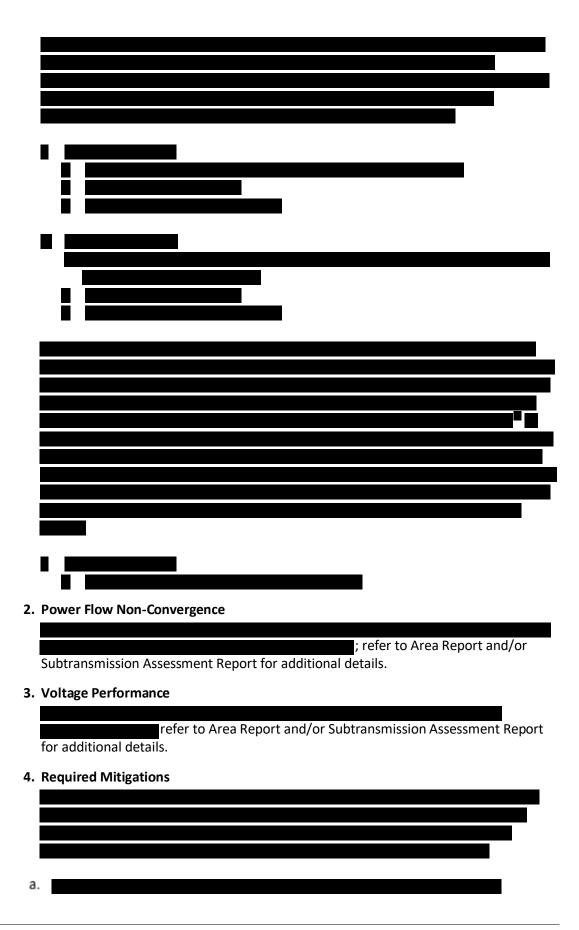

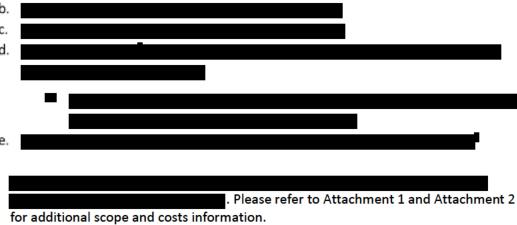

5. Line Loss Analysis for Generating Facility

Based on the technical data provided for the individual generator unit(s), the collector system equivalent, pad-mount and main transformer banks, the internal Generating Facility losses are shown in Table 1. In addition, losses incurred on the generation tie line are shown in Table 2 below. The Generating Facility losses identified represent those assuming the Generating Facility is limiting its output at the high side of the main transformer bank to achieve the desired MW delivery at the POI.



*This represents the MW value needed at the inverter terminal to achieve the desired Net Output MW in order to meet the requested POI MW.



*MW (net) represents the MW value as measured on the high side of the main transfomer bank to achieve the deseired MW delivery at the POI.


a. Power Factor Evaluation

FERC Order 827 provides the reactive power requirements for newly interconnecting non-synchronous generators which requires these resources to design the facility to be capable of providing reactive power to meet power


⁶ Should enough QC13 projects withdraw, allowing WDT1687 to interconnect to the original requested POI in the Devers subtransmission system, these upgrades would be triggered by the addition of WDT1687 and are therefore assigned to the project.

factor 0.95 as measured on the high-side of the IC's substation or other equivalent location. This capability should be dynamic.

Base case power flow was evaluated to determine reactive power losses internal to the Generating Facility in order to ascertain if the reactive capability of the Generating Facility is adequate to supply these losses and meet the power factor requirements. A summary of the power factor evaluation is provided in the table below.

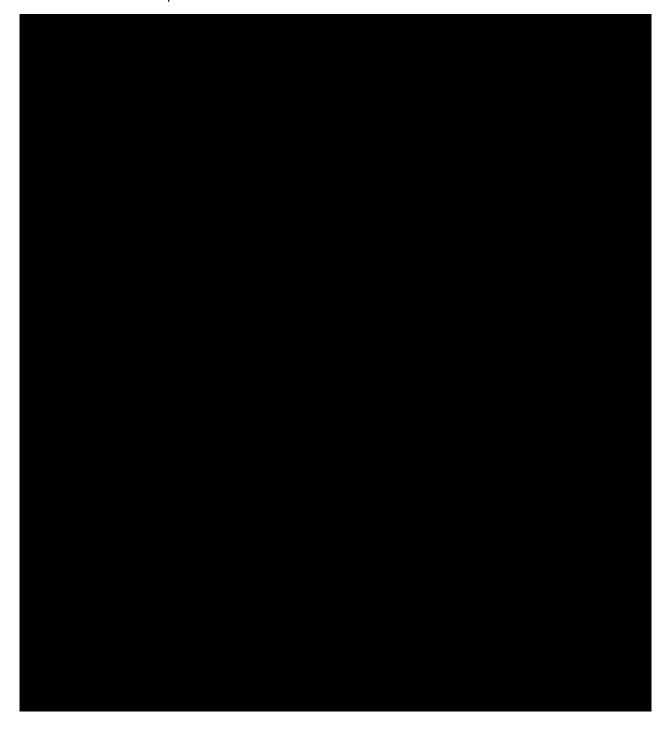



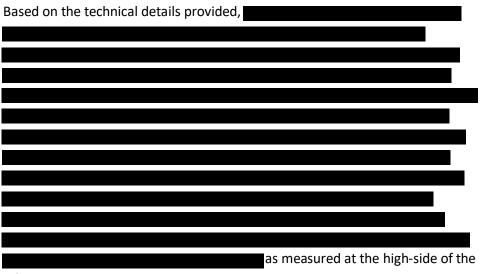


IC's substation or other equivalent location.

b. Transient Analysis

Generating Facility Performance
 Dynamic simulation study results illustrating the frequency and voltage performance of
 the Generating Facility based on the technical parameters supplied for the Generating
 Facility are provided below.

Voltage and Frequency Plots for Generating Facility at the high-side of the IC's substation or other equivalent location with fault at POI

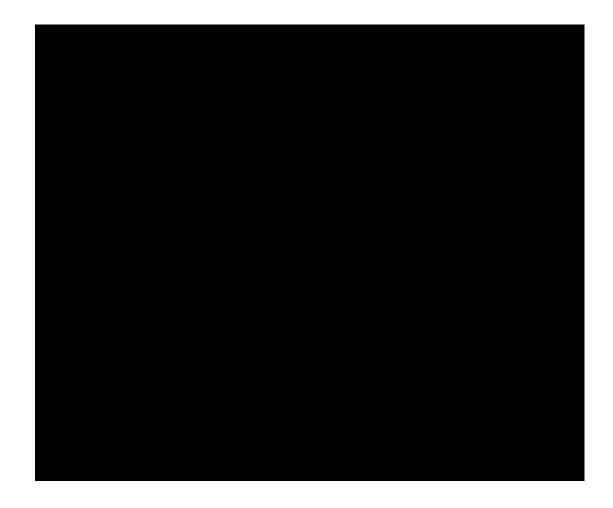








ii. System Performance

Refer to the Area Report for additional details pertaining to the transient stability evaluation criteria and assessment results, respectively.

c. SCD Analysis

i. SCE-owned Facilities

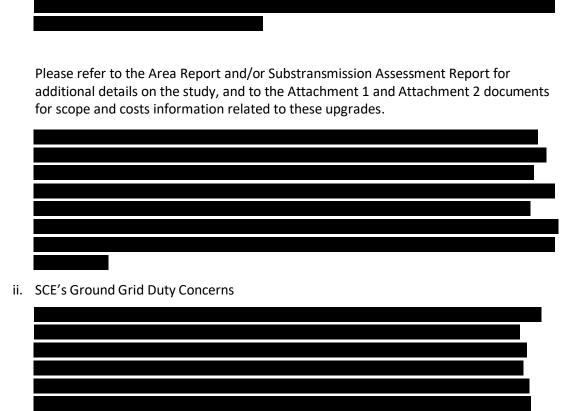


d. As-Available Charging Analysis

H. AFFECTED SYSTEMS SCD RESULTS

The specific SCD contribution from the Generating Facility to Neighboring Utilities is outlined in Table F.1 below. Impacts on the Affected Systems with the addition of all QC13 Phase I projects, are provided in the Area Report (Section H.2), and in Attachment 7.


Table F.1: Short-Circuit Duty Evaluation of Neighboring Utilities Impacted by the Generating Facility

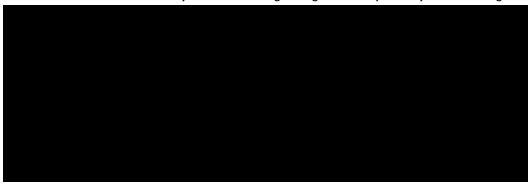

I. DELIVERABILITY ASSESSMENT RESULTS


1. On Peak Deliverability Assessment

The Generating Facility contributes to the following overloads in this Cluster Study:

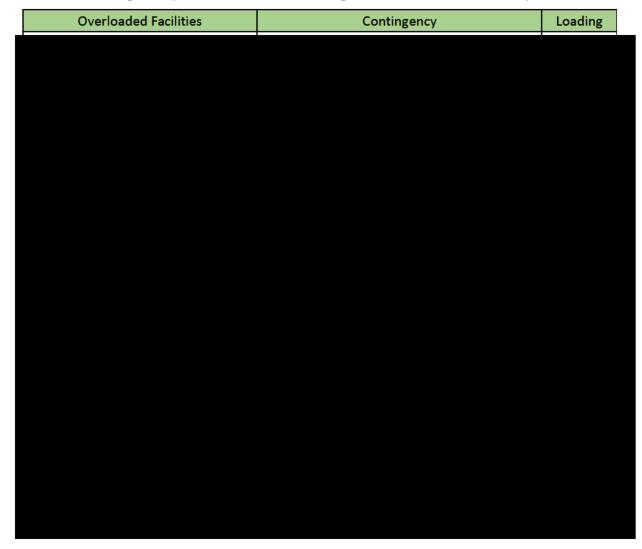

2. Off- Peak Deliverability Assessment For details, see Section G.2 of the Area Report.

3.	Rec	Juired	1 11/111	ıσatı	ınns
•	1100	unce	4 14116	, 5 , 4, 4	0113

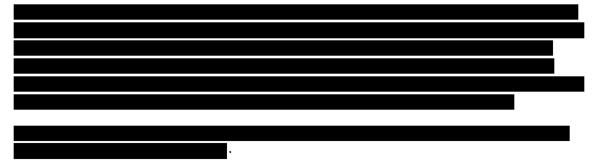

J. INTERCONNECTION FACILITIES, NETWORK UPGRADES, AND DISTRIBUTION UPGRADES

Please see Attachment 1 for SCE's IF's, RNU's, DNU's⁷, and DU's allocated to the Generating Facility for physical interconnection, to provide for the requested MW export at the POI taking into account the requested Deliverability, and in support of ACDS. Please note that SCE considered current system configuration, approved SCE sponsored projects, and all queued generation in determining scope for IFs and/or Plan of Service but will not "reserve" the identified scope of upgrades for the proposed POI unless a GIA is executed per the specified timelines shown in Tale L.1.

K. COST AND CONSTRUCTION DURATION ESTIMATE

I. Cost Estimate

The Generating Facility's estimated interconnection costs, adjusted for inflation and provided in 'constant' escalated to the Generating Facility's feasible COD (as identified below in Table L.1), are provided in Attachment 2 and the Generating Facility's allocated cost for shared network upgrades are provided in Attachment 3 to this Appendix A report. Furthermore, Attachment 2 includes the IC's Generating Facilities Demand charge rate as it relates to ACDS. The interconnection costs will be documented in the forthcoming GIA for the Generating Facility. However, should there be a delay in executing the GIA for the Generating Facility and reflected into the GIA.

II. Preliminary Durations for SCE Engineering, Design, and Construction to enable interconnection of the Generating Facility

The duration shown in Table K.1 represents the estimated time needed for SCE to design, procure, and construct the applicable facilities with the start date of the duration based on the effective date of the GIA; and necessarily include timely receipt of all required information and written authorizations to proceed ("ATP"), and timely receipt of construction payments and financial security postings and other milestones. The durations for the facilities identified for the Generating Facility is as follows:



Table K.1 Estimated Execution Duration

At the IC's discretion, the IC or parties other than SCE pursuant to Section 10.2 under GIP may construct an Option (B) Generating Facility Area Delivery Network Upgrades (ADNUs) not allocated TP Deliverability. If SCE does not construct the ADNUs, the IC is not required to make the third Interconnection Financial Security posting to SCE pursuant to Section 4.8.4.2.1 under GIP.



SCE Notes for SCE Facilities Timelines Identified in Table K.1:

1. Construction Duration Estimates for Identified Upgrades

Any construction durations identified in this section may vary. During the cluster study process, SCE includes all queued and active generation projects without regard to corresponding desired in-service dates or actual status to identify system upgrades, including SCD related upgrades, and a duration for SCE to build them. Such duration affects the ISD for this specific Generating Facility. As status for queued projects change (withdrawals, downsizing, suspensions, or deferred in-service dates), SCE may be able to accelerate in-service dates for projects affected by status changes. Furthermore, SCE will only begin design/construction of an identified system upgrade when enough projects 1) execute and fund a GIA and/or a Letter of Agreement with SCE and 2) those projects trigger the need for an upgrade.

2. Coordination of Environmental Work

Where this study assumes that the IC will perform environmental work related to the installation of SCE's IFs, and DUs as specified in this report, the IC is advised that any durations provided above assume so and that the IC will perform this environmental work related to the installation of SCE's IFs and/or DUs specified in this report and will perform them in parallel with SCE's preliminary design and engineering. The IC is expected to engage SCE to obtain concurrence prior to commencement of any environmental work and during execution of that work. Since SCE will be using the IC's environmental documents and/or work products, IC delays producing them may delay SCE's ability to obtain required permits and/or license(s). Such delays would likely cause additional delays in the commencement of SCE's final engineering, procurement, and construction. These delays could increase any durations identified in this report and push out the feasible ISD provided in Table L.1 ISD and COD Assessment.

III. Other Potential Costs to the Generating Facility

In an effort to provide the IC with as much information as possible about maximum financial responsibility for such other potential Network Upgrades, the scope and cost of these upgrades are included in certain sections of this study, including the cost table in Attachment 2 as other potential Network Upgrades. As shown in the cost table in Attachment 2, the IC is not responsible for posting Interconnection Financial Security for these other potential

Network Upgrades unless the other potential Network Upgrades become the financial responsibility of the Generating Facility.

The process by which these other potential Network Upgrades can become the responsibility of the Generating Facility is set forth in Section 10.3.2 of the GIP Attachment I. The process is dependent on a number of factors; such as, 1) whether the earlier-queued project(s) that initially required the Network Upgrades has executed an interconnection agreement (or filed unexecuted), and 2) whether upon withdrawal or termination of the interconnection agreement by the earlier-queued project(s), the ISO and SCE determine that the other potential Network Upgrades are still required by the Generating Facility. Any change in the IC's financial responsibility for any Network Upgrade cost not already identified in this study report will be reflected in a revision to this study report and amendment to the GIA (as applicable).

L. IN-SERVICE DATE AND COMMERCIAL OPERATION DATE ASSESSMENT

An ISD and COD assessment was performed for the Generating Facility to establish SCE's estimate of the earliest achievable ISD based on the cluster study process timelines and the time required for SCE to complete the facilities needed to enable physical interconnection as an Interim Deliverability or Energy Only Deliverability interconnection (as applicable) for the Generating Facility. This date may be different from the IC's requested ISD and will be the basis for establishing the associated milestones in the draft GIA.

1. ISD Estimation Details

For the QC13 Phase I Interconnection Study, the estimated earliest achievable ISD is derived by the time requirements to complete the following:

- 1. QC13 Interconnection Study Process
- 2. Tender a draft GIA
- 3. Negotiate and execute the GIA
- 4. Longest duration associated with the facilities required to interconnect the Generating Facility (i.e., IF, RNU, and DU), per the durations specified in table K.1. above.

Calendar Days or Action or Months for **Item Description Target Date** Assumption Calculation Issuance of Phase II Interconnection Study Report Add: 30 CD Phase II Results Meetings For WDTs the assumption is that the TPD Results issued and IC response provided **Starting Point: before starting the draft GIA** (the IC does have the option to start the GIA negotiation earlier) 30 CD Add: Earliest reasonable Tender draft GIA GIA negotiation time, execution, and related Add: 90 CD

activities


Table L.1 ISD and COD Assessment

Add: Construction Duration (Months)	Construction duration outlined in the Phase II Study Report. Construction completion no earlier than date which reflects earliest ISD	
Reference:	IC-requested ISD via IR	
Reference:	IC-requested COD via IR	
	Duration difference between ISD and COD (months)	
Equals:	Earliest achievable In-Service Date (ISD) per estimated construction duration	
	Earliest achievable Commercial Operation Date (COD) (Using difference between ISD and COD requested by IC)	

Notes on the Achievable ISD and COD calculation:

- 1) This calculation assumes that the duration to construct those facilities required for an Interim Deliverability Interconnection or Energy Only interconnection (as applicable) for the Generating Facility until the applicable DNUs are completed.
- 2) The construction durations shown represent the estimated amount of time needed to design, procure, and construct the facilities with the start date of the duration based on the effective date of the GIA; and necessarily include timely receipt of all required information and written authorizations to proceed ("ATP"), and timely receipt of construction payments and financial security postings and other milestones.
- 3) The IC-requested dates are specified in the Generating Facility's IR. Actual ISD, Initial Synchronization Date, and COD will depend on licensing, engineering, detailed design, and construction requirements to interconnect the Generating Facility after the GIA has been executed or filed at the FERC for acceptance. Table L.1 provides SCE's preliminary estimated achievable ISD and COD for the Generating Facility.
- 4) Assumes that GIA is tendered after the Transmission Plan Deliverability ("TPD") allocation results are disclosed.

2. ISD Conclusion

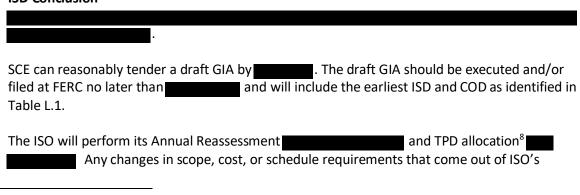

Annual Reassessment and TPD Allocation will be reflected in a Reassessment Report, if applicable, which will be used to revise the draft GIA (if under negotiation) or amend the GIA (if already executed).

M. ADDITIONAL STUDY ANNOTATIONS

1. Conceptual Plan of Service

The results provided in this study are based on conceptual engineering and are preliminary. The information is not sufficient for permitting purposes and is subject to change as part of final engineering and design.

- 2. The study does not include analysis related to the power output rate of change that may occur due to the following or other conditions:
 - System morning start up for solar generating facilities: That is when each morning the Generating Facility commences to generate and export electrical energy to the electric system.
 - Cloud Cover: Solar generating facilities have significant generation output variation (Variability) which can have an impact on electric system voltage profiles.

3. IC's Technical Data

The study accuracy and results for the QC13 Phase I Interconnection Study were contingent upon the accuracy of the IR technical data provided by each IC during the Interconnection Study Cycle. Any changes from the data provided as allowed under GIP should be submitted in Attachment B within ten (10) Business Days following the Phase I Interconnection Study Results Meeting. Any changes in the Attachment B submission that extend beyond the modifications allowed in accordance with Section 4.5.7.2.2 of GIP would need to be evaluated under a Material Modification Assessment (MMA). To determine if such change(s) results in a material impact to queued-behind generation.

4. Study Impacts on Affected Systems

Results or consequences of this Phase I Interconnection Study may require additional studies, facility additions, and/or operating procedures to address impacts to neighboring utilities and/or regional forums. For example, impacts may include but are not limited to WECC Path Ratings, short-circuit duties outside of the ISO Controlled Grid, and sub-synchronous resonance (SSR). Refer to Affected Systems Coordination Section H of the Area Report and above in Section F for additional information.

5. Use of SCE's Facilities

a. Crossing of SCE-owned Lines and Property

The IC is responsible for acquiring all property rights necessary for the IC's Interconnection Facilities, including those required to cross the SCE's facilities and property. This Interconnection Study does not include the method or estimated cost to the IC of SCE mitigation measures that may be required to accommodate any proposed crossing of SCE's facilities. The crossing of SCE's property rights shall only be permitted upon written agreement between SCE and the IC at SCE's sole determination. Any proposed crossing of SCE property rights will require a separate study and/or evaluation, at the IC's expense, to determine whether such use may be accommodated. If the IC's Facilities result in the need to modify SCE's existing facilities, SCE recommends that the IC identify and include a description of such modifications in the IC's environmental study reports submitted to the

lead agency permitting the Generating Facility. An interconnection customer may initiate this process by contacting SCE's Land Management Department at this link: https://www.sce.com/partners/real-estate-and-locations/secondary-land-use.

b. Utilizing SCE Property or ROW

In instances where a site deposit is provided in lieu of site control documents for the location of a Generating Facility, and the site plan for the Generating Facility included in the IR package depicts the Generating Facility location on SCE owned property or utilizing SCE ROW; the IC will be required to provide an alternative site or submit a secondary land use request to SCE's Land Management Department for review and approval. A secondary land use request to support third party generation development is unlikely to get approved by SCE, but nevertheless the IC can submit a secondary land use request to SCE's Land Management Department for a review and approval at this link: https://www.sce.com/partners/real-estate-and-locations/secondary-land-use.

6. SCE's Interconnection Handbook

The IC shall be required to adhere to all applicable requirements in SCE's Interconnection Handbook. These include, but are not limited to, all applicable protection, voltage regulation, VAR correction, harmonics, switching and tagging, and metering requirements.

7. Western Electricity Coordinating Council ("WECC") Policies

The IC shall be required to adhere to all applicable WECC policies including, but not limited to, the WECC Generating Unit Model Validation Policy.

8. System Protection Coordination

Adequate Protection coordination will be required between SCE-owned protection and IC-owned protection. If adequate protection coordination cannot be achieved, then modifications to the IC-owned facilities (i.e., Generation-tie or Substation modifications) may be required to allow for ample protection coordination.

9. Standby Power and Temporary Construction Power

The Phase I Interconnection Study does not address any requirements for standby power or temporary construction power that the Generating Facility may require prior to the ISD of the IF's. Should the Generating Facility require standby power or temporary construction power from SCE prior to the ISD of the IF's, the IC is responsible to make appropriate arrangements with SCE to receive and pay for such retail service. SCE recommends that the IC identify and include a description of such facilities in the IC's environmental study reports submitted to the lead agency permitting the Generating Facility.

10. Licensing Cost and Estimated Time to Construct Estimate (Duration)

The estimated licensing cost and durations applied to this Generating Facility are based on the Generating Facility scope details presented in this Phase I Interconnection Study. These estimates are subject to change as the Generating Facility's environmental and real estate elements are further defined. Upon execution of the GIA, additional evaluation including but not limited to preliminary engineering, environmental surveys, and property right checks may enable licensing cost and/or duration updates to be provided.

11. Network/Non-Network Classification of Telecommunication Facilities

a. Non-Network (IF) Telecommunications Facilities: The cost for telecommunication facilities that were identified as part of the IC's Interconnection Facilities was based on an assumption that these facilities would be sited, licensed, and constructed by the IC. The IC will own, operate, maintain, and construct main and diverse telecommunication paths

- associated with the IC's generation tie line, excluding terminal equipment at both ends. In addition, the telecommunication requirements for the RAS were assumed based on tripping of the generator's breaker in lieu of tripping the circuit breakers and opening the IC's gen-tie at SCE's substation.
- b. Network (Network Upgrades) Telecommunications Upgrades: Due to uncertainties related to telecommunication upgrades for the numerous projects in queues ahead of this Generating Facility, telecommunication upgrades for earlier queued projects without a signed GIA which upgrades have not been constructed were not considered in this study. Depending on the scope of these earlier queued projects, the cost of telecommunication upgrades identified for Phase I may be reduced. Any changes in these assumptions may affect the cost and schedule for the identified telecommunication upgrades.

12. Ground Grid Analysis

A detailed ground grid analysis will be required as part of the final engineering for the Generating Facility at the SCE substations whose ground grids were flagged with duty concerns.

13. SCE Technical Requirements

The IC is advised that there may be technical requirements in addition to those that outlined above in Section C of this report that will be addressed in the Generating Facility GIA.

14. Applicability

This document has been prepared to identify the impact(s) of the Generating Facility on the SCE's electric system; as well as establish the technical requirements to interconnect the Generating Facility to the POI that was evaluated in the final Phase I Interconnection Study for the Generating Facility. Nothing in this report is intended to supersede or establish terms/conditions specified in GIAs agreed to by the SCE, ISO, and the IC.

15. Process for Initial Synchronization Date/Trial Operation Date and COD of the Generating Facility

The IC is reminded that the ISO has implemented a New Resource Implementation ("NRI") process that ensures that a generation resource meets all requirements before Initial Synchronization Date/Trial Operation Date and COD. The NRI uses a bucket system for deliverables from the IC that are required to be approved by the ISO. The first step of this process is to submit an "ISO Initial Contact Information Request form" at least seven (7) months in advance of the planned Initial Synchronization Date. Subsequently an NRI project number will be assigned to the Generating Facility for all future communications with the ISO. SCE has no involvement in this NRI process except to inform the IC of this process requirement. Further information on the NRI process can be obtained from the ISO Website using the following links: New Resource Implementation webpage:

http://www.caiso.com/participate/Pages/NewResourceImplementation/Default.aspx

NRI Checklist:

http://www.caiso.com/Documents/NewResourceImplementationChecklist.xls

NRI Guide:

http://www.caiso.com/Documents/NewResourceImplementationGuide.doc

16. ISO Market Dispatch

This study did not evaluate any potential limitations that may be driven by the ISO market under real-time operating conditions.

17. Interconnection Request to Third-Party Owned Facilities

Generating Facility's requesting to interconnect to a Third party owned facility will need to obtain written approval from the owner(s) of the facility prior to execution of the GIA.

18. Transmission Voltage Reference

Identification of facility voltages (220 kV) in this Phase I Study are shown consistent with SCE System Operating Bulletin 123. However, all studies were predicated on the base voltages reflected in the WECC base cases. For the SCE bulk power system, the WECC base cases reflect 230 kV and 500 kV base voltages; consequently, all per-unit calculations presented were based on 230 kV and 500 kV voltages.

Attachment 1:

Interconnection Facilities, Network Upgrades, and Distribution Upgrades

Please refer to separate document

Attachment 2:

Escalated Cost and Time to Construct for Interconnection Facilities, Reliability Network Upgrades, Delivery Network Upgrades, and Distribution Upgrades

Please refer to separate document

Attachment 3:
Allocation of Network Upgrades for Cost Estimates and Maximum Network
Upgrade Cost Responsibility





Attachment 4: SCE's Interconnection Handbook


Preliminary Protection Requirements for Interconnection Facilities are outlined in SCE's Interconnection Handbook at the following link:


 $https://library.sce.com/content/dam/sce-doclib/documents/business/generating-your-own-power/grid-interconnections/SCE_InterconnectionHandbook.pdf$

Attachment 5: Short-Circuit Duty Calculation Study Results

Please refer to the Appendix H of the Area Report

Attachment 6: IC Provided Generating Facility Dynamic Data

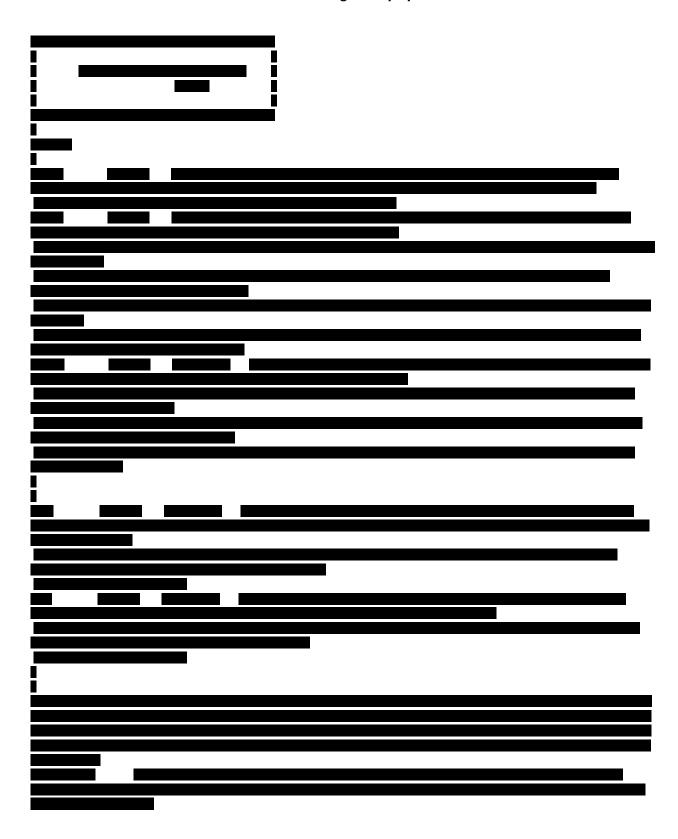

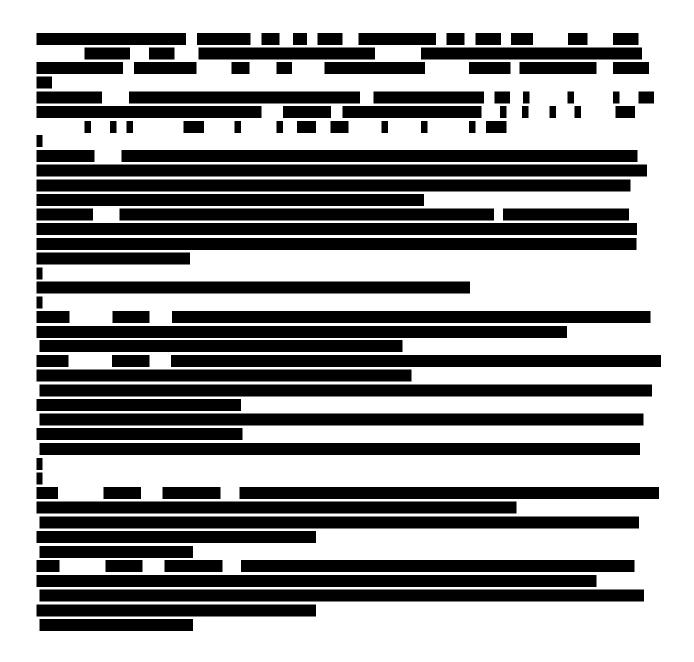

Attachment 7: Subtransmission Assessment Report

Please refer to separate document